


NOTES:

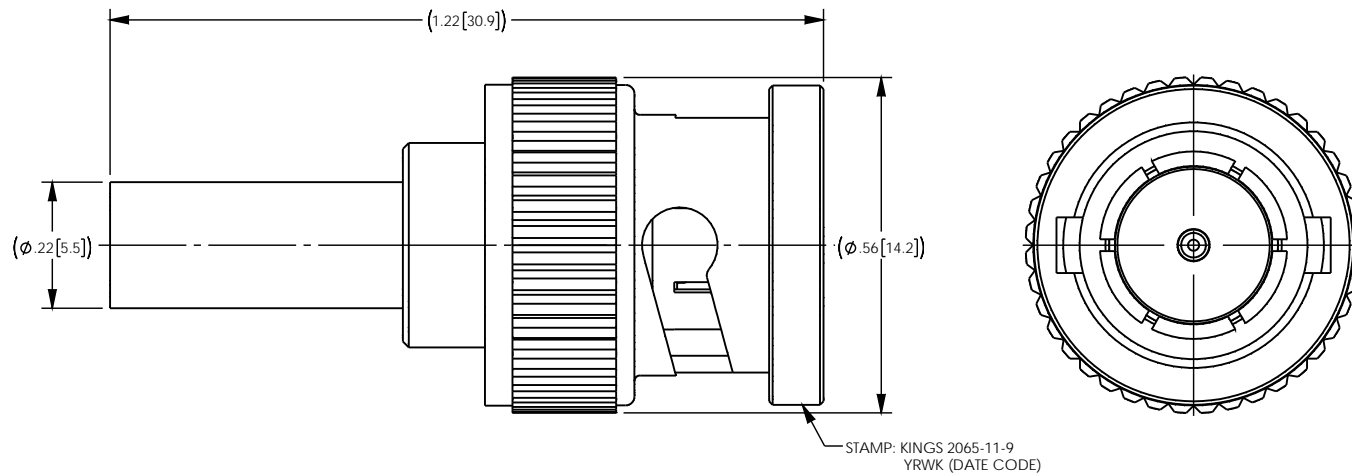

1. FOR USE WITH COMMSCOPE 77538 & BELDEN 1855A & 1865A CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-661-1.
3. FOR CRIMPING USE DIE KTH-2025.
4. CENTER CONTACT, 1-6690-7M9Y, AND K-GRIP SLEEVE 1-33983-1M06 SUPPLIED UNASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MATERIAL SPECIFICATIONS:  
INSULATOR: PTFE PER ASTM D4894.  
GASKET: SILICONE RUBBER PER ZZ-R765.  
SPRING WASHER AND OUTER CONTACT: BERYLLIUM COPPER PER ASTM B196.  
ALL OTHER METAL PARTS: BRASS PER ASTM B16.
7. FINISH SPECIFICATIONS:  
CENTER CONTACT: GOLD PER MIL-G-45204  
SPRING WASHER: SILVER PER QQ-S-365  
ALL OTHER METAL PARTS: NICKEL PER QQ-N-290

8. ELECTRICAL SPECIFICATIONS:  
IMPEDANCE: 75 OHMS  
WORKING VOLTAGE: 500 VOLTS RMS  
FREQUENCY RANGE: DC - 12 GHz  
RETURN LOSS: -30dB MAX TO 3.0 GHz  
-20dB MAX TO 6.0 GHz
9. COMPLIANT TO 3G/6G/12G SDI SMPTE REQUIREMENTS.
10. MARK PACKAGE: KINGS 2065-11-9.

REV	DESCRIPTION	BY	APPD
K	ER066126	JL	DCAM
		12/20/16	



CATALOG P/N: 2065-11-9

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .000X ANGLES: ± 2° SCALE: 4:1				 by WINCHESTER ELECTRONICS Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762				
CUSTOMER SALES DRAWING			 THIRD ANGLE	75 OHM BNC PLUG FOR BELDEN 1855A OR EQUIVALENT CABLE (ROHS)				
DRAWN	DATE	APPROVED	DATE	A	SD2065-11-9	SHT 1	OF 1	REV K
JL	04/09/2015	MAN	07/28/2015					
APPROVED	DATE	APPROVED	DATE					
YA	04/09/2015	XXX	XX/XX/XX					